



# ELECTRIC BOOST TIMER / FUSE SPUR HM65BOOST



-  **'BOOST'** OVERRIDE HEATING CONTROL
-  NOT SUITABLE FOR DISCHARGE LIGHTING
-  OWD - OPEN WINDOW DETECTION MODE
-  **4°C** OPERATING TEMPERATURE: 0 TO 40°C

## DESCRIPTION


The Heat Matrix electronic boost timer fuse spur switch provides timed output protected by a BS1362 fuse. Automatic timed countdown selections tied to a fail safe OFF using a simple push button with LED status output. Simply replace existing single gang connection units or fixed appliance outlets.

Up to 5 ON times can be selected: first press of the button activates 1 hour boost with displayed LED status, second press will activate 2 hour boost. Single button presses will activate an additional hour of boost each time up to a max. of 5 hours. The automatic timer countdown to zero at which point it puts the switch into fail safe OFF mode. Ideal for immersion and room heaters automatically switching off at end of time period set.

Fits a standard flush or surface mount BS wall box min. 25mm deep. Typical applications such as immersion heaters, room heaters, heated mirrors, towel rails and selected lighting applications.

**This unit comes with a 2 year warranty.**

## DIMENSIONS

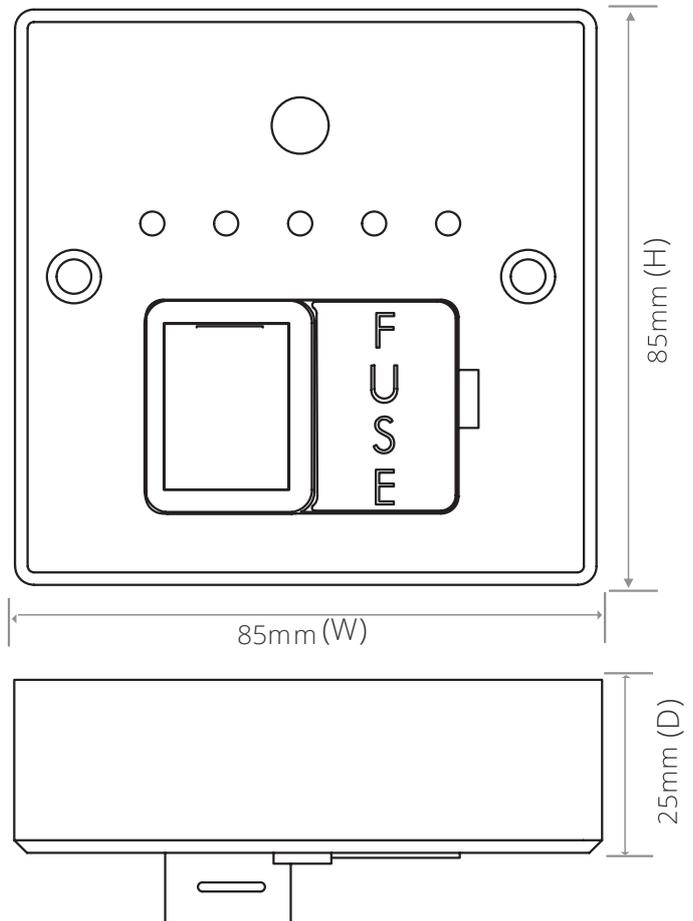

## TECHNICAL DATA

SUPPLY VOLTAGE	MAX LOAD CURRENT	POWER CONSUMPTION	DIMENSIONS (mm)			WEIGHT (g)
			H	W	D	
230v-50Hz	16 A	0.45 W	85	85	25	130

